




This Adjustable Z-Blade Louver with Fusible Link is Ideal for Use in Fire Doors up to 1-1/2 Hour Rating. Ideal for Installation in Existing Door Cutouts.



**SPECIFICATIONS:**

<b>Material:</b>	16 gauge CRS frame and louver blades. Min size 10" x 6", Max 24" x 24".
<b>Construction:</b>	<b>Louver:</b> Z-blade louvers riveted to operating bar and frame at 1" intervals to welded 1-9/16" deep frame. Mechanical stop holds blades open. <b>Frame:</b> Mitered and welded corners; screws fastened through prepared frame into louver core leaving corridor side of frame free of fasteners.
<b>Operation:</b>	Adjustable blades of 16 gauge CRS pivot on cadmium-plated steel rivets. The blades are operated by a manual adjusting lever. A spring loaded fusible link mechanism is incorporated into the design. Upon melting of the link, the action bar is actuated, thereby closing and locking all of the blades.
<b>Door :</b>	For 1-3/4" door. Door cutout = order size.
<b>Fasteners:</b>	#8 x 3/4" Phillips flathead screws.
<b>Powder Coat Finishes:</b>	<input type="checkbox"/> (B) Mineral Bronze (standard color) <input type="checkbox"/> (G) Gray <input type="checkbox"/> (BK) Black <input type="checkbox"/> (FBK) Flat Black <input type="checkbox"/> (W) White <input type="checkbox"/> (SB) SC Beige <input type="checkbox"/> (SA) Satin Aluminum <input type="checkbox"/> (S) Sand <input type="checkbox"/> (AB) AMS Beige <input type="checkbox"/> (R) Red <input type="checkbox"/> (GH) Gray Hammertone <b>Color Samples Online</b>
<b>Free Flow Area:</b>	45% free area.

**SELF-ATTACHING FRAME**

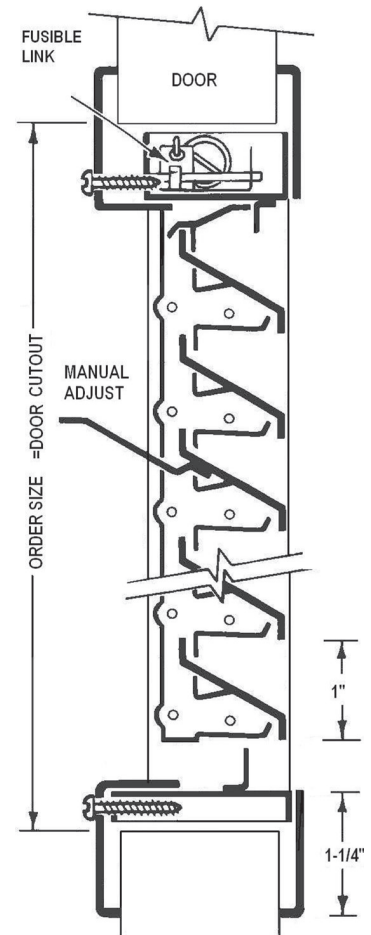

**OPTIONAL FEATURES AT AN ADDITIONAL COST:**

<b>Finishes &amp; Materials:</b>	<input type="checkbox"/> (S) 18 gauge stainless steel—#4 finish. <input type="checkbox"/> (EG) Electro Galvanized for corrosion resistance & exterior use. <input type="checkbox"/> Special order colors. Please provide color chip.
<b>Fasteners:</b>	<input type="checkbox"/> Torx <input type="checkbox"/> Hex head <input type="checkbox"/> Other: _____
<b>Screen:</b>	<input type="checkbox"/> Insect or Bird Screen.
<b>Custom:</b>	Custom sizes, other door thickness. Contact Customer Service.

**Order Format:** 1900A \_\_\_\_\_  
**Example:** 1900A1212SA Option S,EG W H Color

**LISTINGS & RATINGS:**

**Fire Ratings with UL & WHI Classification Marks**

**Model 1900A** is Rated for use in fire doors up to 1-1/2 hour rating. Louver size shall not exceed maximum of 576 sq. inches, 24"W and 24" H. The minimum width and height shall not be less than 10" and 6", respectively. Louvers may be provided for classified hollow metal type and composite type fire doors. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards. Louver frame will be labeled with Listing mark.

**STOCK ITEM— 6 SIZES OF 1900A IN STOCK FOR NEXT DAY SHIPMENT FROM ONE OF OUR 5 WAREHOUSES**

	<b>Distributor:</b> _____	<b>Width:</b> _____ <b>x</b> <b>Height:</b> _____
	<b>Architect:</b> _____	<b>Quantity:</b> _____
	<b>Contractor:</b> _____	<b>Model:</b> _____
	<b>Project:</b> _____	<b>Date:</b> _____ <b>Version:</b> ALSPDS1001

HQTRS:4450 WEST 78<sup>TH</sup> ST CIR., BLOOMINGTON, MN 55435-5416 PH: 800-554-6077 FAX: 952-835-2218 EMAIL: SALES@AIRLOUVERS.COM

VISIT **WWW.ACTIVARCPG.COM** FOR THE MOST UPDATED PRODUCT INFORMATION • AN ACTIVAR CONSTRUCTION PRODUCTS COMPANY  
 ACPG WEST COAST (AIR LOUVERS MANUFACTURING):COMMERCE CA • WAREHOUSES:LANCASTER PA, ATLANTA GA, CHICAGO IL , Bloomington MN